




Clingfoil

SIAT SM11

- Best suited to batch sealing of uniform-sized cases. Automatic closure of upper-case flaps. Simultaneous top and bottom carton/box flap sealing. Increased case throughput and a consistently professional finish. Heavy duty drive belts for both light & heavy cases.

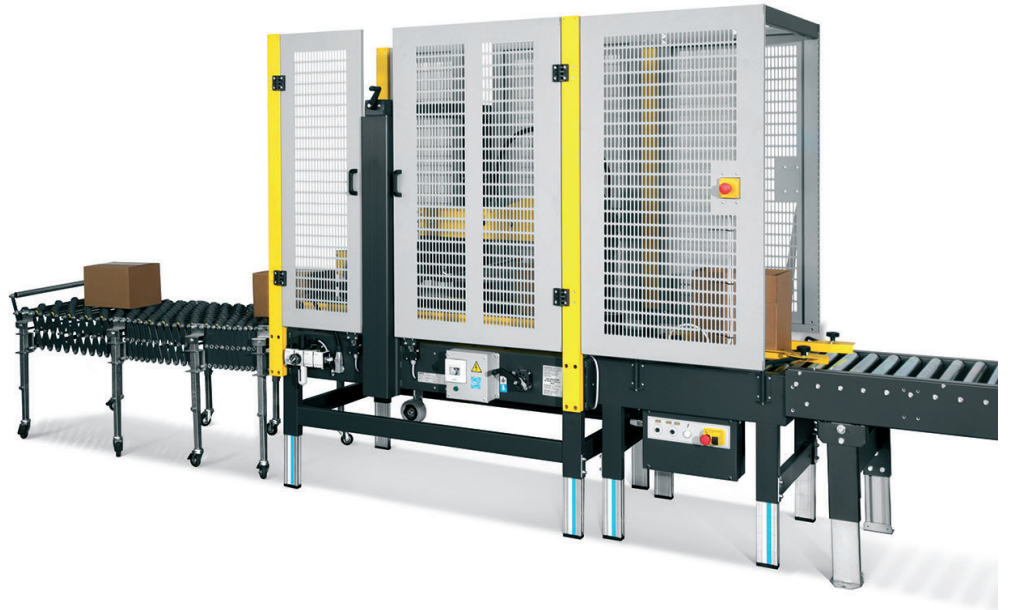

> Machine dimensions
Dimensioni macchina
Machinemessungen
Dimensions machine
Dimensiones de máquina

Size / Weight packaging	Kg	kg	LxWxH
> SM11	340	390	160x110x205
> SM11/4	340	390	160x110x205
> SM116	500	615	230x150x215

> SM11

	Min.	Max
L	2526	-
W	1058	-
H	1770	2110
cbh	480	820
AS 77	580	920
AS 80	680	1020


> SM11/4

	Min.	Max
L	2526	-
W	1058	-
H	1770	2110
cbh	480	820
AS 77	580	920
AS 80	680	1020

> SM116

	Min.	Max
L	2834	-
W	1058	-
H	1770	2110
cbh	480	820
AS 77	580	920
AS 80	680	1020

> Box dimensions
Dimensioni delle scatole
Kartonabmessungen
Dimensions des boîtes
Dimensiones de cajas



> SM11

	K11R / K12R
	Min. Max
I	200 600
w	150 500
h	100 600


> SM11/4

	K11R
	Min. Max
I	200 600
w	105 500
h	100 600

> SM116


	K11R / K12R
	Min. Max
I	300 900
w	150 650
h	180 700

> Taping units
Unità nastranti
Verschliesseinheiten
Unités enrubanneuses
Unidades de precinto



	K11R/ K12R
	mm
A	410 Max
B	50 / 75
C	76

> Production capacity
Capacità di produzione
Produktionskapazität
Capacité de production
Capacidad de producción




> SM11	Bph
Max pcs.*	1200

> SM11/4	Bph
Max pcs.*	1200

> SM116	Bph
Max pcs.*	900

* Always based on shorter manageable box

> Air consumption
Consumo aria
Luftverbrauch
Consommation d'air
Consumo de aire




> SM11	NL.
Cycle	2

> SM11/4	NL.
Cycle	2

> SM116	NL.
Cycle	2

from 5,5 bar to 7 bar

> Standard voltage
Voltaggio standard
Standardspannung
Tension standard
Voltaje estándar



> SM11	
380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE

> SM11/4	
380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	1,08
Power kW	0,26
Phase	3Ph + PE


> SM116	
380/400V - 50Hz - 3F	
440V - 60Hz - 3F	
Amps	2
Power kW	0,46
Phase	3Ph + PE

> Optionals
Accessori
Zubehör
Accessories
Accesorios


> AS80
Higher legs
Set gambe più alte
Höhere Stützen
Pieds plus hauts
Patas más altas




> AS77
Casters
Set ruote
Rädchen
Roulettes
Ruedas




> RG
Roller conveyor
Piani a rulli
Rollenbahnen
Plans à rouleaux
Rodillos libres



> GTL - GTR
Extendable conveyor
Rulliera estensibile
Ausziehbares rollenbahnen
Convoyeur extensible
Rodillos extensibles



> K-125 / K-250
Inkjet printer
Stampante ad inchiostro
Tintenstrahldrucker
Marqueur à jet d'encre
Impresora de inyección de tinta




Cod.pubbli.:SBC0028672



SM11 / SM116

Automatic Uniform Size Carton Sealing Machine

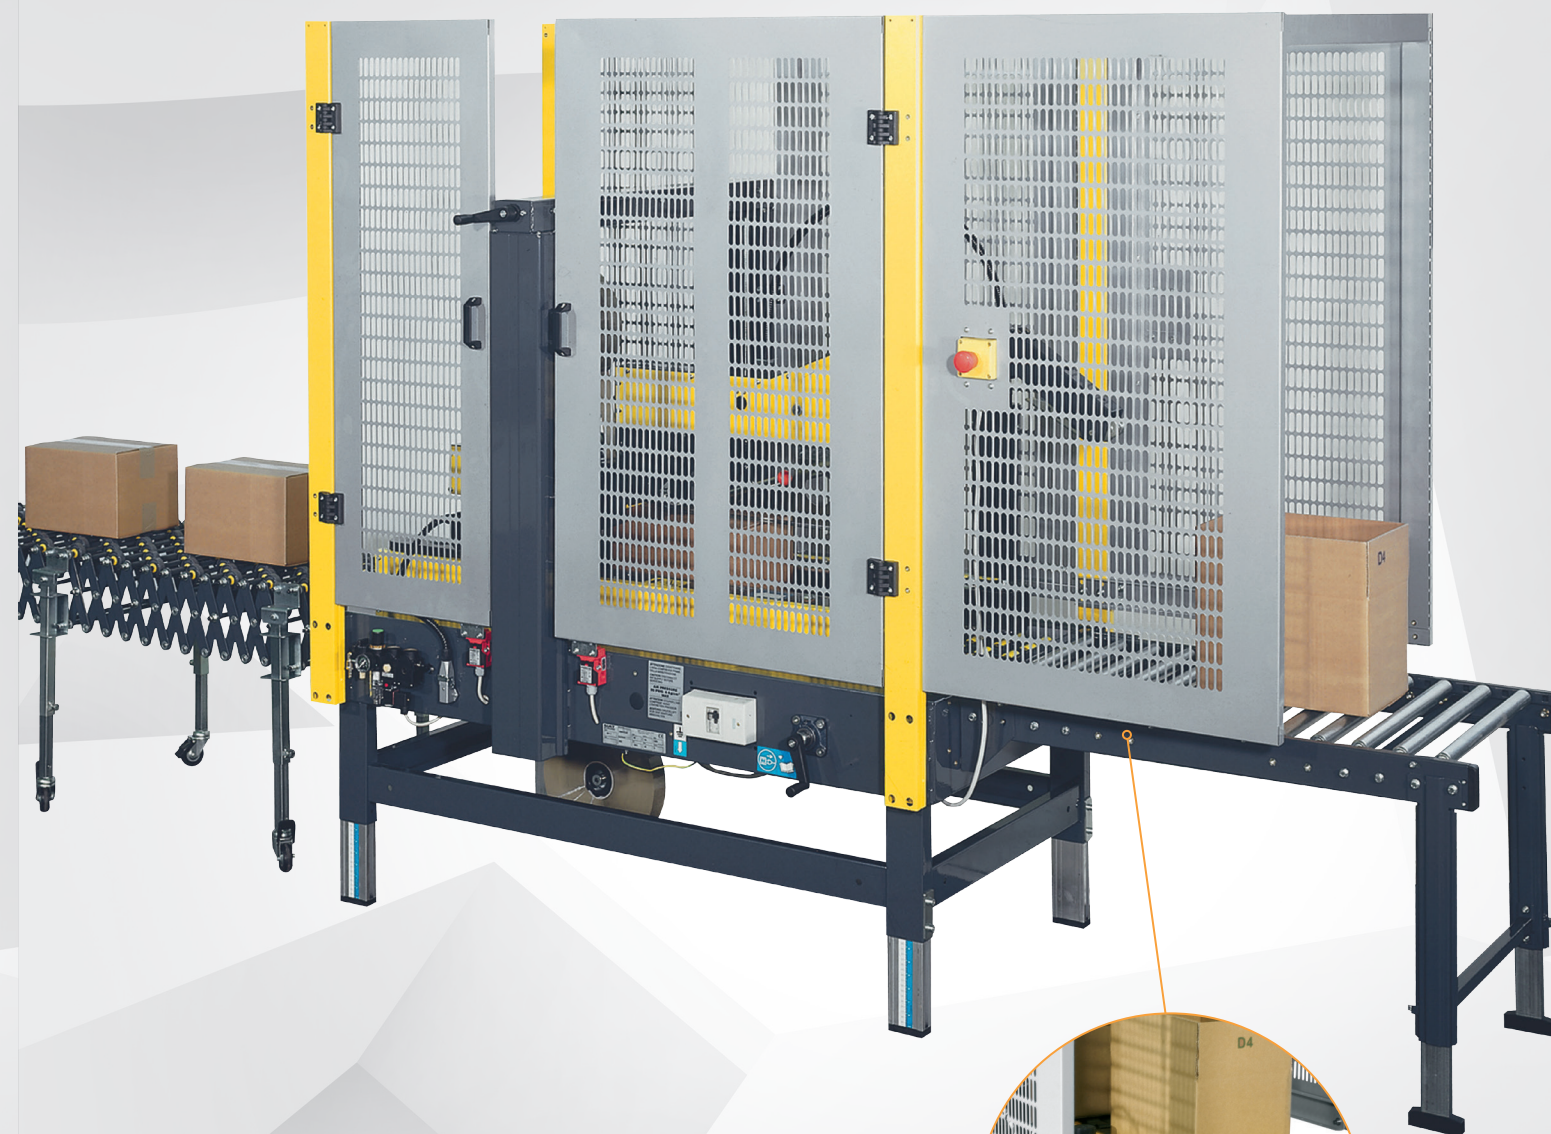

SM11 + AG21 Motorized indexing unit with timer control (Optional)



SIAT S.p.A.

Via Puecher, 22 - 22078 Turate (CO) Italy
Tel +39.02.964951 • Fax +39.02.9689727
www.siat.com • siat@siat.com



for more details:



SM11

SM11

SM11 model is an automatic sealing machine with manual adjustment. For this reason, it is used for long production runs with the same box dimensions. The machine is designed to apply automatically a "C" strip of adhesive tape to the top and bottom of boxes. Adjustments and use of SM11 case sealer are intuitive, simple and fast.

SA11 & SA11/4



These machines are supplied with a switch to control the movement of the top taping unit. It is possible thanks to a system of pneumatic pistons.



Low tape/no tape sensor device (Optional)




Automatic top flaps folding device

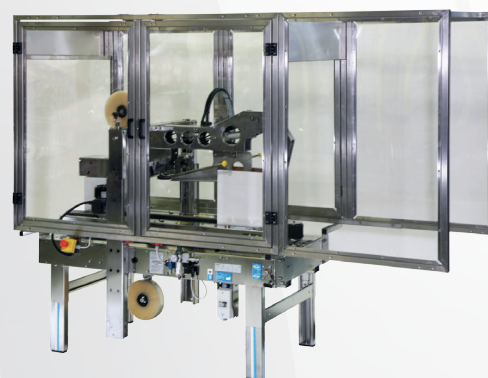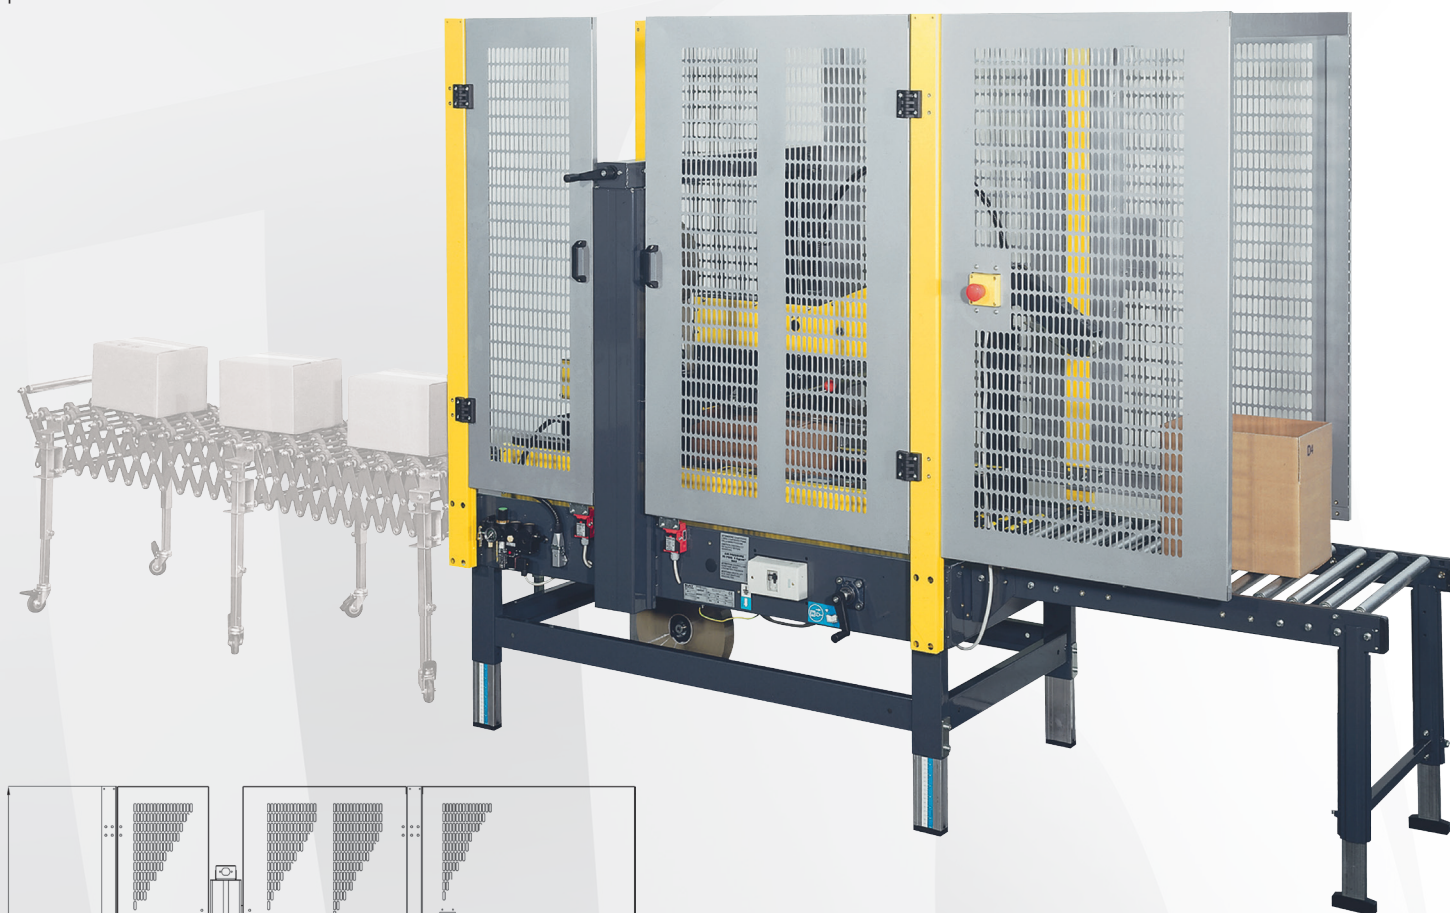


SM11-INOX

Machine suitable for use in high humidity environments or in contact with corrosive substances. Except for the plastic parts, all components of the machine are made of stainless steel.

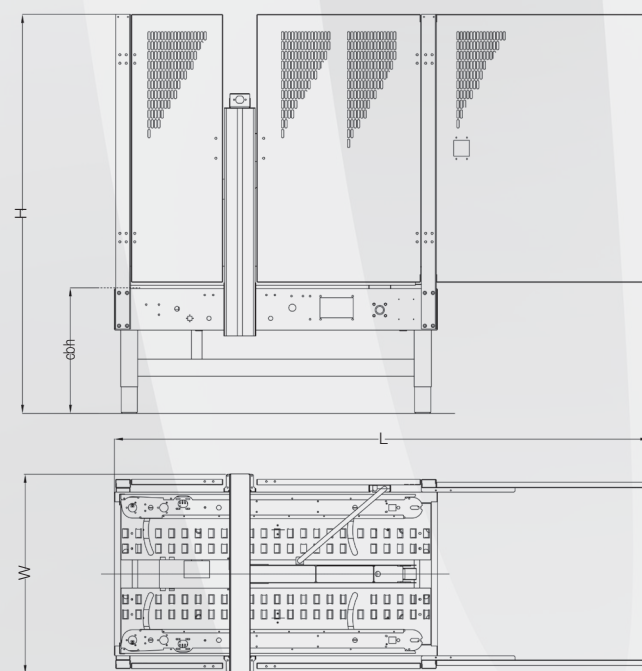

SM116

SM116 model is an automatic sealing machine designed for medium and large boxes. It is supplied with K12R taping unit - 75 mm width.

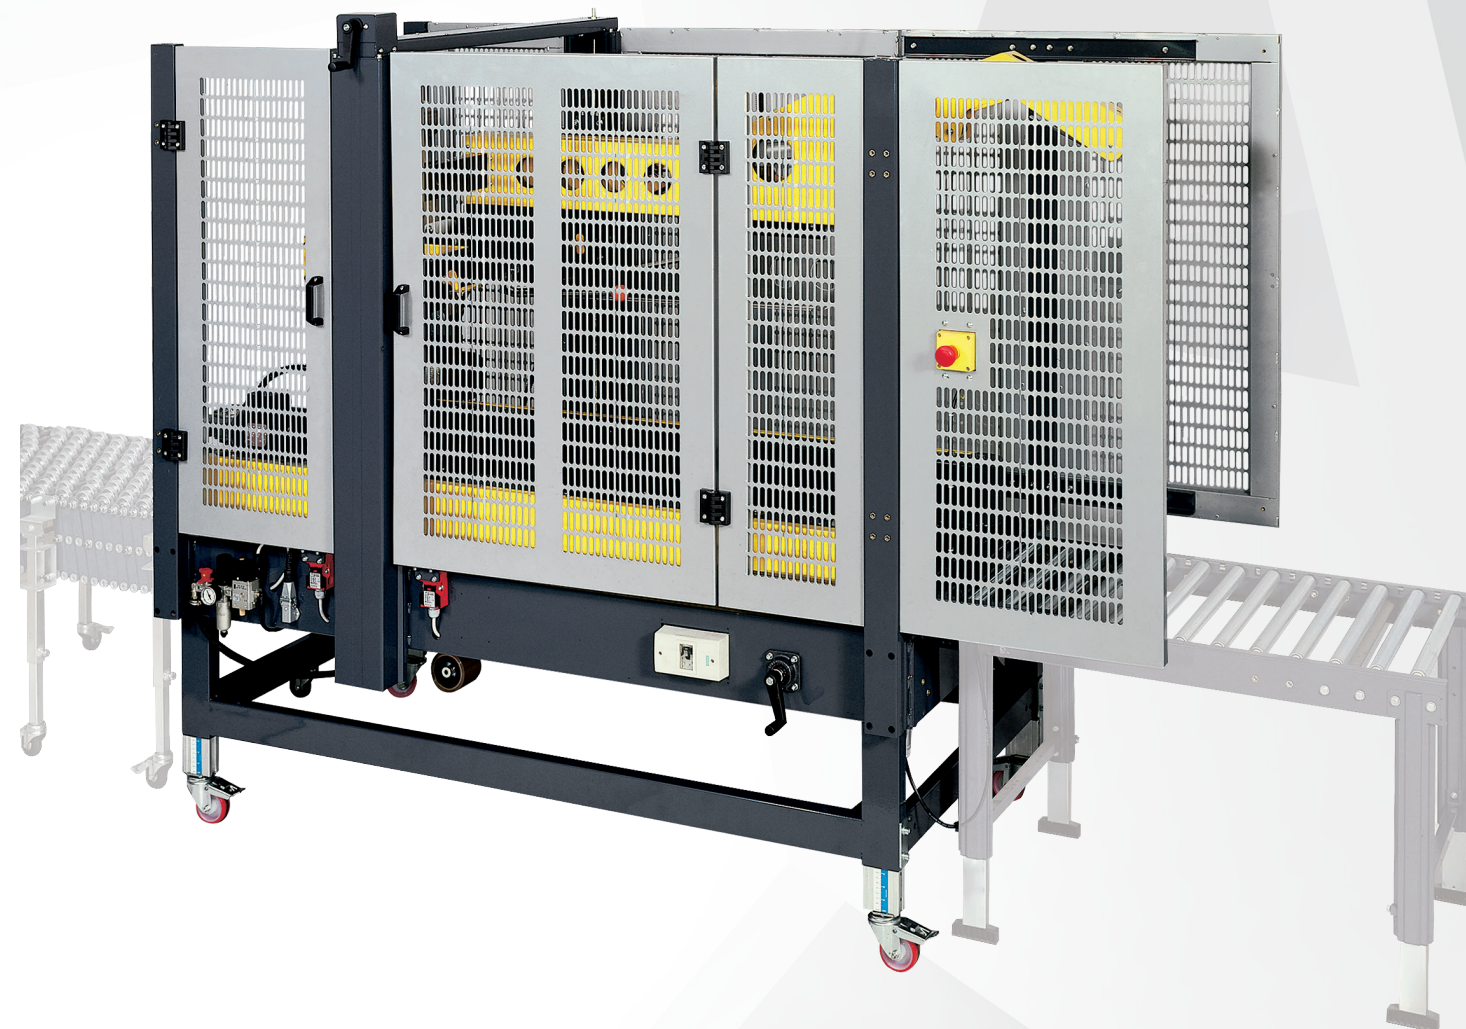

AG21 Motorized indexing unit with timer control (Optional)

